



E381 & E383 Conversion Table - Plain Gauge

ISO-9001:2008
QMS Certified



Measured value
(mm)

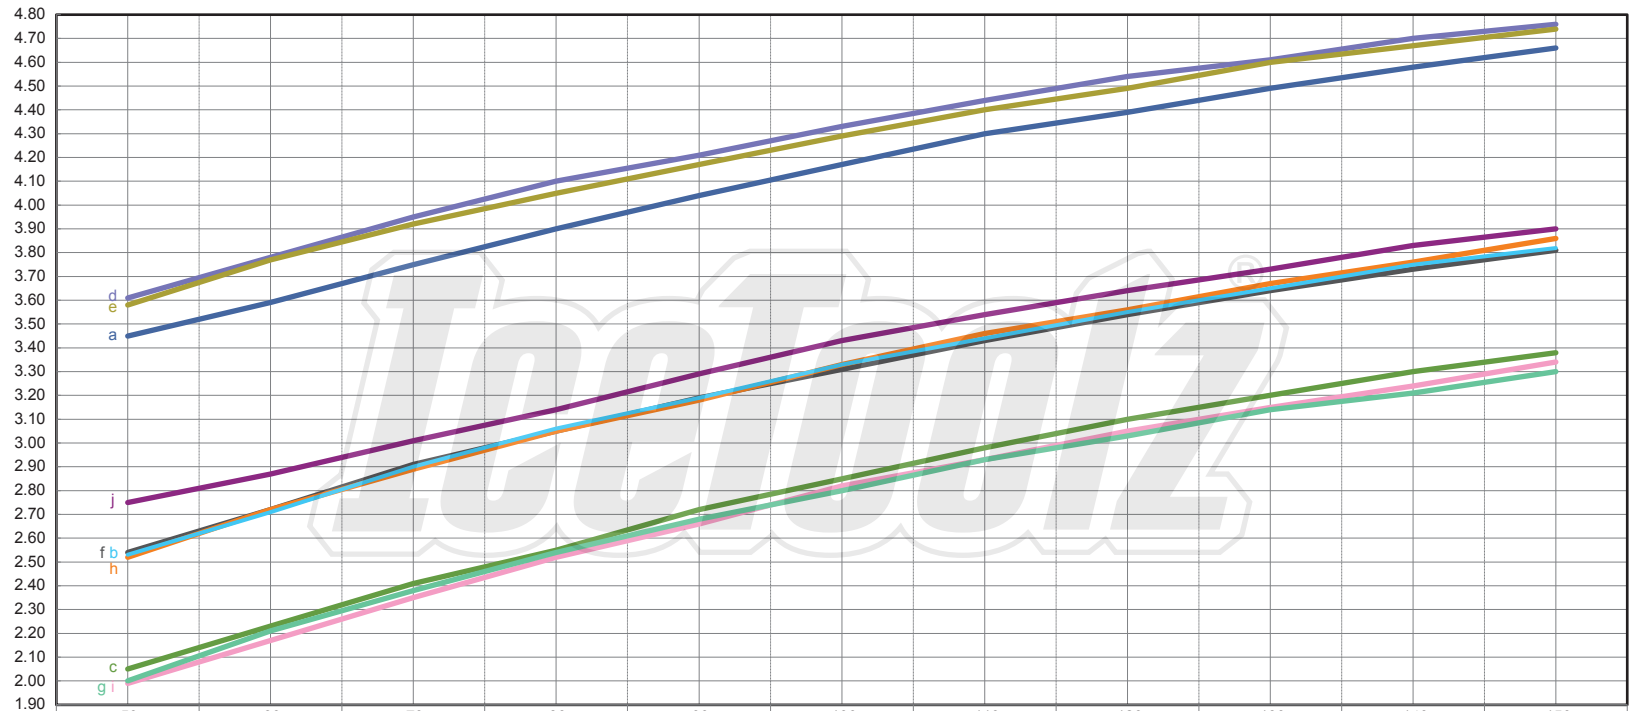

	50	60	70	80	90	100	110	120	130	140	150
a — CN SPOKE STD13C 2.25mm	3.45	3.59	3.75	3.90	4.04	4.17	4.30	4.39	4.49	4.58	4.66
b — CN SPOKE STD 14C 2.0mm	2.53	2.71	2.90	3.06	3.19	3.33	3.44	3.55	3.65	3.75	3.82
c — CN SPOKE STD 15C 1.8mm	2.05	2.23	2.41	2.55	2.72	2.85	2.98	3.10	3.20	3.30	3.38
d — CN SPOKE CN134T 2.3-2.0T mm	3.61	3.78	3.95	4.10	4.21	4.33	4.44	4.54	4.61	4.70	4.76
e — CN SPOKE M134T 2.3-2.0T mm	3.58	3.77	3.92	4.05	4.17	4.29	4.40	4.49	4.60	4.67	4.74
f — CN SPOKE MAC 14 2.0mm	2.54	2.72	2.91	3.05	3.19	3.31	3.43	3.54	3.64	3.73	3.81
g — CN SPOKE MAC 15 1.8mm	2.00	2.21	2.38	2.54	2.68	2.80	2.93	3.03	3.14	3.21	3.30
h — DT SWISS Champion 2.0mm	2.52	2.72	2.89	3.05	3.18	3.33	3.46	3.56	3.67	3.76	3.86
i — DT SWISS Champion 1.8mm	1.99	2.17	2.35	2.52	2.66	2.82	2.93	3.05	3.15	3.24	3.34
j — SAPIM Leader 14G 2.0mm	2.75	2.87	3.01	3.14	3.29	3.43	3.54	3.64	3.73	3.83	3.90

1 kgf = 9.8 N = 2.204 lbf

Spoke tension (kgf)